Item description/product images



Description

Material:
Steel version
Indexing pin hardened:
grade 5.8.

Stainless steel version
Indexing pin hardened:
Threaded sleeve 1.4305.
Indexing pin 1.4034.

Indexing pin not hardened:
Threaded sleeve 1.4305.
Indexing pin 1.4305.

Mushroom knob black-grey thermoplastic.

Version:
Steel version:
Indexing pin hardened, ground, black oxidised.


Stainless steel version:
Indexing pin hardened, ground and bright.
Indexing pin not hardened, ground and bright.

Note:
Indexing plungers are used to prevent any change in locking position due to lateral forces. A new locking position can only be set after the pin has been manually disengaged. Form C or D is recommended for applications in which the pin is disengaged over extended periods and should be prevented from springing back.

On request:
Special versions and spacer rings.

Drawings

Form C
lockout type
without locknut

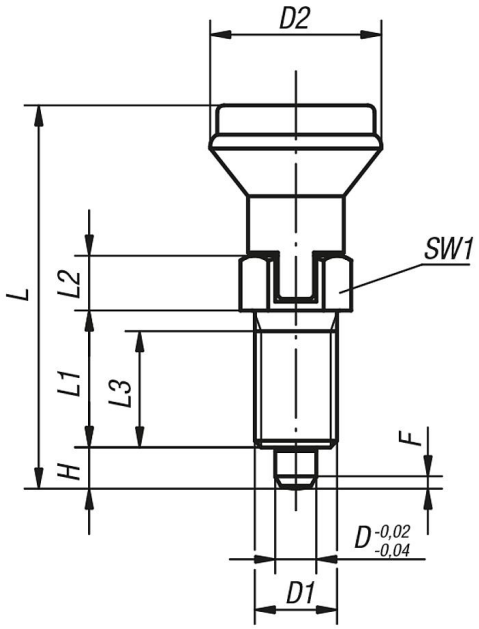

Overview of items

Order No. steel	Order No. stainless steel	Form	D	D1	D2	L	L1	L2	L3	H	SW1	Fx30°	Spring force initial pressure F1 approx. N	Spring force final pressure F2 approx. N
03090-3105	03090-03105	C	5	M10x1	21	47	17	7	15	5	13	1,3	5	12
-	03090-13105	C	5	M10x1	21	47	17	7	15	5	13	1,3	5	12
03090-3206	03090-03206	C	6	M12x1,5	25	56	20	8	17	6	14	1,8	6	14
-	03090-13206	C	6	M12x1,5	25	56	20	8	17	6	14	1,8	6	14
03090-3308	03090-03308	C	8	M16x1,5	33	74	26	10	23	8	19	2,3	15	35
-	03090-13308	C	8	M16x1,5	33	74	26	10	23	8	19	2,3	15	35
03090-3410	03090-03410	C	10	M20x1,5	33	80	28	12	25	10	22	2,8	15	34
-	03090-13410	C	10	M20x1,5	33	80	28	12	25	10	22	2,8	15	34