

FF

EE

DD

UU

BB

AA

FF


EE

DD

UU

BB

AA

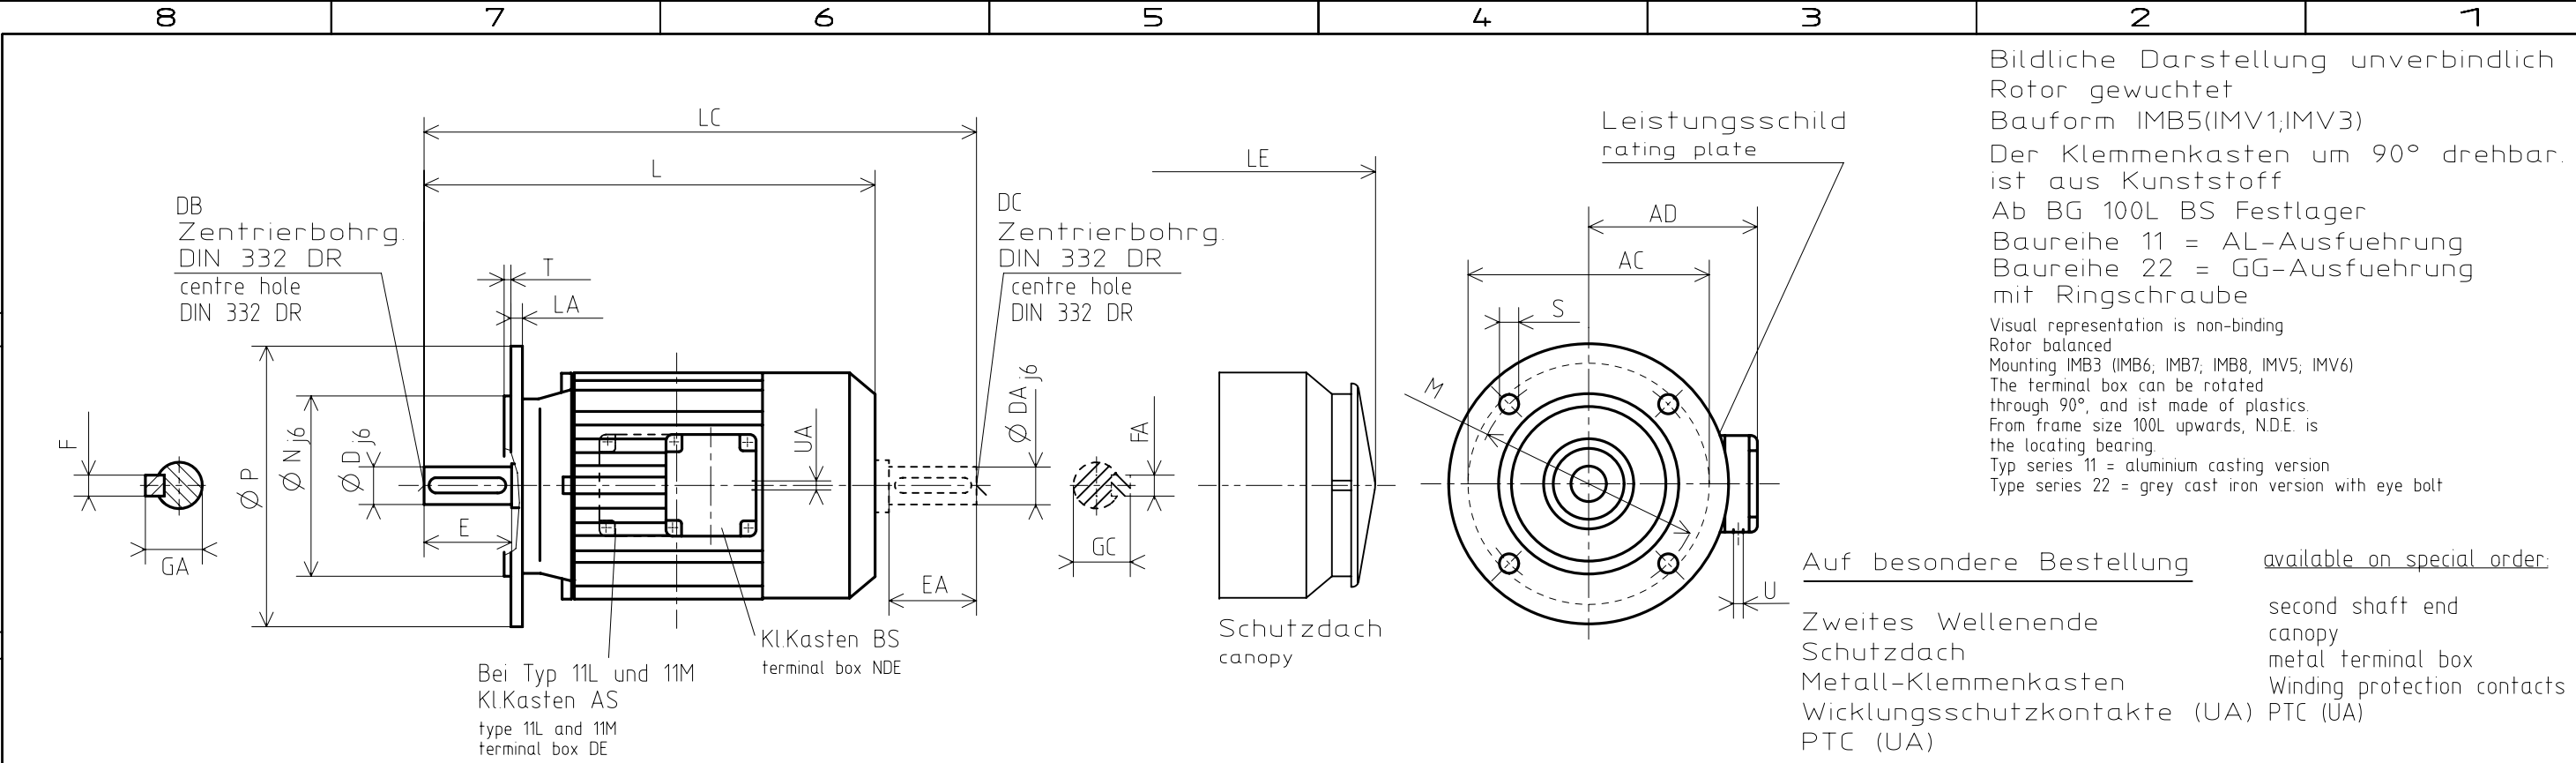

BG	Typ	AC	AD	D	DA	DB	DC	E	EA	F	FA	GA	GC	L	LA	LC	LE	M	N	P	S	T	U	UA	Kl.Kasten Lage
90S 90L	AF90S/-11 AF90L/-11	176	148	24	24	M8	M8	50	50	8	8	27	27	294 319	10	353 378	325 350	165	130	200	12	3,5	2xM25x1,5	-	BS
90L	AF90L/-11L	176	148	24	24	M8	M8	50	50	8	8	27	27	329	10	388	360	165	130	200	12	3,5	2xM25x1,5	-	AS
100L	AF100L/-11(12)	196	155	28	28	M10	M10	60	60	8	8	31	31	363	11	433	394	215	180	250	14,5	4	2xM25x1,5	1xM16x1,5	BS
100L	AF100L/-11(12)L	196	155	28	28	M10	M10	60	60	8	8	31	31	383	11	453	414	215	180	250	14,5	4	2xM25x1,5	1xM16x1,5	AS
100L	AF100L/-11(12)M	196	155	28	28	M10	M10	60	60	8	8	31	31	403	11	473	434	215	180	250	14,5	4	2xM25x1,5	1xM16x1,5	AS
100L	AF100L/-22(23)	198,5	155	28	28	M10	M10	60	60	8	8	31	31	380	11	452	408	215	180	250	14,5	4	2xM25x1,5	1xM16x1,5	AS
100L	AF100L/-22(23)L	198,5	155	28	28	M10	M10	60	60	8	8	31	31	400	11	472	428	215	180	250	14,5	4	2xM25x1,5	1xM16x1,5	AS
112M	AF112M/-11(12)	220	168	28	28	M10	M10	60	60	8	8	31	31	380	11	452	412	215	180	250	14,5	4	2xM25x1,5	1xM16x1,5	BS
112M	AF112M/-11(12)L	220	168	28	28	M10	M10	60	60	8	8	31	31	400	11	472	432	215	180	250	14,5	4	2xM25x1,5	1xM16x1,5	AS
112M	AF112M/-11(12)M	220	168	28	28	M10	M10	60	60	8	8	31	31	420	11	492	452	215	180	250	14,5	4	2xM25x1,5	1xM16x1,5	AS

⑥

Masse in mm

2000

Tag

Name

⑥

S17.0986

22.22.17

Remi

Bearb.

08.11

Buehler

⑤

AF112M/ -11M neu

28.02.13

SI

④

BR 22 neu

09.11.11

RS

Inc.

Aenderung

Tag

Name

Plot:

Drehstrom-Motor

3-phase-motor

Schutzart IP55

degree if protection IP55

EN 50347

AF27_20M

Blatt 1

Aen.

6