

Datasheet



Quote Q26.0277093
Cust Impexron GmbH

Ref 1958267



Mors 1-5, 7151 MX Eibergen NL
www.rotor.nl tel.: +31 545 464640
sales@rotor.nl tel.: +31 545 464646

Model No. 4-Pole cage motor 6RN 100L 3kW D400V 50Hz IM2081-FF215 6RN100L04E35U46B config 2081

U (V)	Δ / Y Conn	f [Hz]	P [kW]	P [hp]	I [A]	n [RPM]	T [Nm]	IE Class	% EFF at __ load FL 3/4FL 1/2FL	PF at __load FL 3/4FL 1/2FL	I _A /I _N [pu]	T _A /T _N [pu]	T _K /T _N [pu]
400	D	50	3	4	5,9	1460	19,6	IE3	87,7	0,83	8,30	2,50	3,40
690	Y				3,4								
460	D	60	3	4	5,2	1775	16,1	IE3	89,5	0,80	9,00	2,95	4,84

Motor type	6RN100L04E35
Enclosure	Totally Enclosed Fan Cooling
Frame Material	Cast iron
Frame size	100L
Duty	S1
Voltage	400 V
Frequency	50 Hz
Power output	3 kW
Insulation class	F
Ambient temperature	-20 till 40 °C
Temperature rise winding	42 K
Temperature rise surface	28 K
Altitude above sea level	1000 mtr
Hazardous area classification	Safe area

Degree of protection	IP55
Mounting type	IM2081-FF215
Cooling method	IC411
Motor weight - approx.	43 kg
Gross weight - approx.	44 kg
Motor inertia	0,0140 kgm ²
Vibration level	according IEC60034-14
Noise level (pressure) acc 60034-9	60 dB(A)

Rotor type	Cage motor
Bearing type	6306-2Z/C3WT - 6306-2Z/C3WT


Direction of rotation	cw /ccw
-----------------------	---------

Type of grease	Unirex N3
----------------	-----------

Phase resistance at 20°C	4,3460 Ohm
Country of origin	CZ

Voltage/Freq	Locked rotor Torque [% nom]	Starting current [% nom]	Pull-up Torque [% nom]	Breakdown Torque [% nom]	No-load Current [A]
@ D 400V 50Hz	250%	479%		340%	2,75 A
@ D 460V 60Hz	295%	900%	165%	484%	2,65 A

Schematic presentation of torque-speed curve

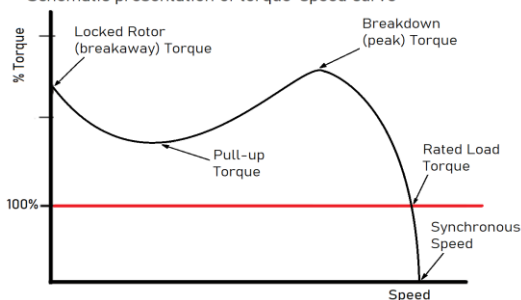

NOTE

All performance values at rated voltage and frequency.

All performance parameters are subjected to standard tolerance as per IEC 60034-1

Voltage, Frequency are as per IEC60034-1

Technical data are subject to change. There may be discrepancies between calculated and name plate values.

Efficiency	Europe	Global IEC
Standards	EN-IEC: 60034-30	IEC: 60034-30

P000014756
P000014018



This is an uncontrolled copy, data can be changed anytime.

Driving efficiency and sustainability



55485