



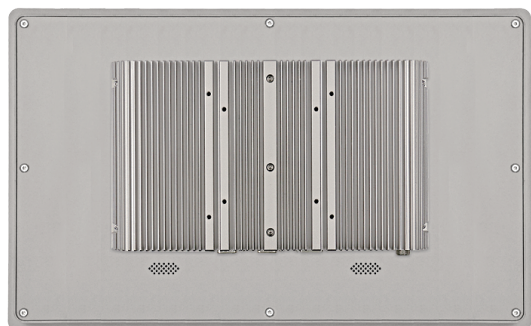

特点Main Feature

- Intel Celeron J6412
- Touch Screen,
- Front panel IP65
- Fanless
- 9 ~ 36V Wide Voltage

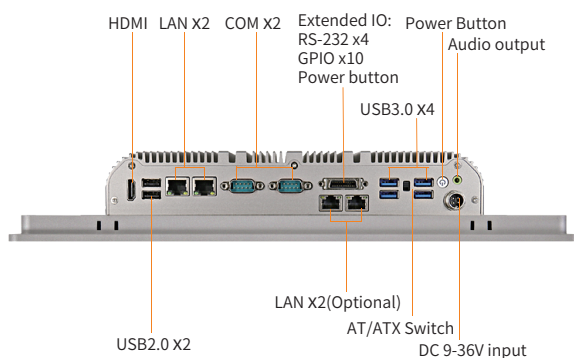


规格Spec

System		
Model	HST-1506	
Processor	Intel Celeron J6412 CPU Intel	
RAM	DDR4 SODIMM x1 8GB DDR4 RAM	
LAN	2x 2.5 GbE RJ45 Intel® i225V (4 x 2.5GbE RJ45 Intel i225V)	
I/O Ports	4 x USB2.0 , 2 x USB3.0 2 x DB-9 COM1&COM2,RS-232/422/485 1 x Audio Line-out 2 x 8Ω 1W Speaker (Option) 1 x AT/ATX (Switch) 1 x HDMI 1 x Extend IO: 4*COM, 10pin GPIO, 1*Switch	
Storage	1 x M.2 2242/2260/2280 SATA 128GB SSD 1 x SATA(2.5'' SATA) 1 x M.2 2280 NVME	
Slots	M.2 3042/3052 3G/4G/5G Module, 1*SIM slot M.2 2230 WIFIBT	
WatchDog	1~ 65535 S programmable setting	
OS	Windows® 10/11, WES 10, LINUX	
MD		
Material	Aluminum Alloy	
Installation	VESA 75/ 100 , Panel Installation	
Size	402.76x252.19x65.3 mm	
Weight	TBD	
Environment Requirment		
Environment	-20° C ~ 60° C	
Store Temperature	- 30° C ~ 70° C	
Store Humidity	10~90% @30° C, No Condensation	
Power		
Power input	DC 9 ~ 36V 4-pin	
Screen		
LCD Type	15.6" TFT-LCD	
Resolution	1920x1080	
Color	262K	
Brightness	250 cd/m²	
Visual CR>=10)	- 85 ~ 85° (H), - 85 ~ 85° (V)	
Backlight	LED	
Backlight life(hour)	30,000	
Touch Screen		
Type	5 wire resistance type	Projected capacitor
Transmittance	78%	>85%
Working life	250a hits 10 million times	>50 million times

HYSTOU HST-1506 15.6" Industrial Tablet PC

Size ■ mm

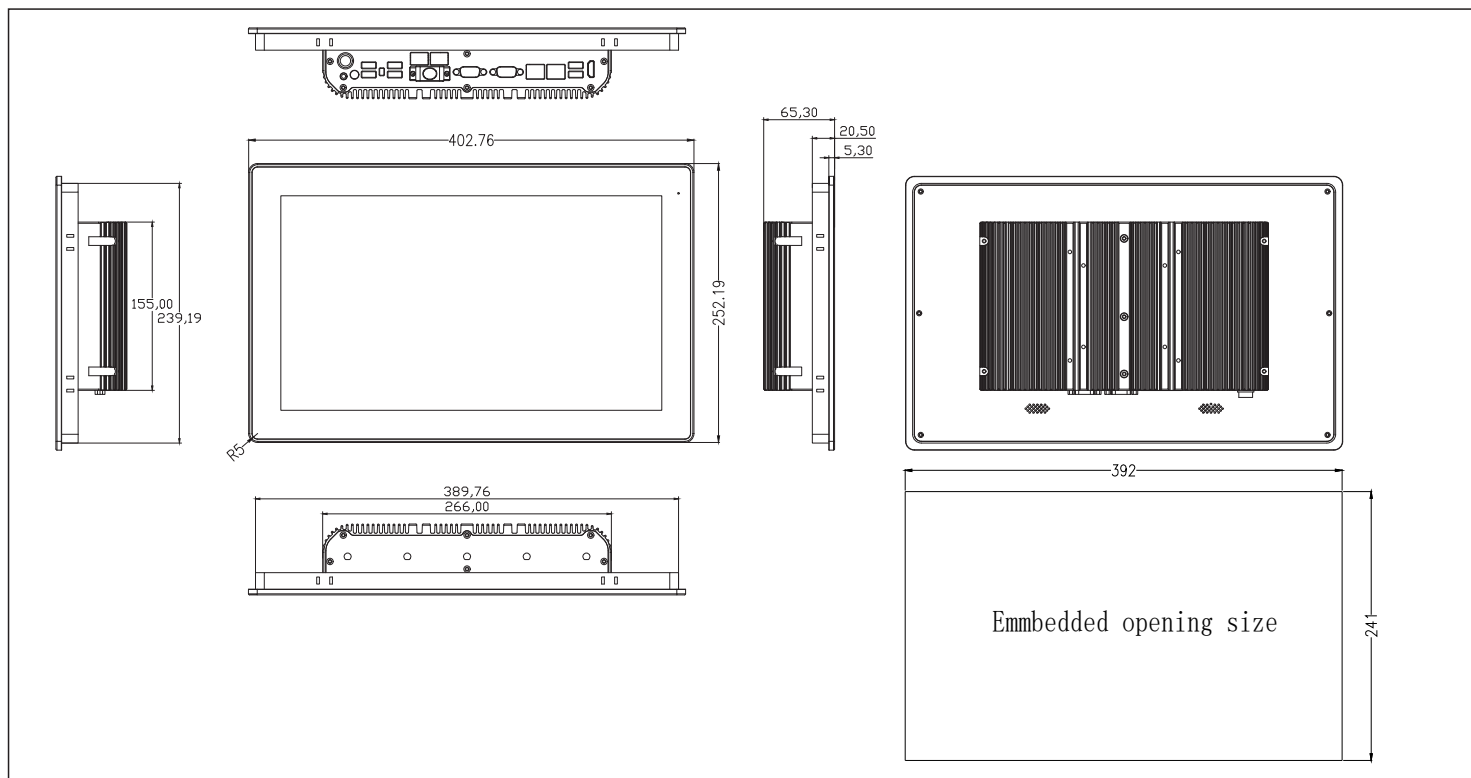

Material code	Description
HST-1506-J4125	15.6" TFT LCD J4125 CPU DDR4 SODIMM x1 2xUSB3.0,4x USB2.0 2x LAN 6 x COM 1xPower Adapter
HST-1506-J6412	15.6" TFT LCD J6412 CPU DDR4 SODIMM x1 2xUSB3.0,4x USB2.0 2x LAN 6 x COM 1xPower Adapter
HST-1506-I5-8260U	15.6" TFT LCD i5-8260U CPU DDR4 SODIMM x2 4xUSB3.0,2x USB2.0 2x LAN 6 x COM 1xPower Adapter
HST-1506-I5-8365U	15.6" TFT LCD i5-8365U CPU DDR4 SODIMM x2 4xUSB3.0,2x USB2.0 2x LAN 6 x COM 1xPower Adapter
HST-1506-I7-8565U	15.6" TFT LCD i7-8565U CPU DDR4 SODIMM x2 4xUSB3.0,2x USB2.0 2x LAN 6 x COM 1xPower Adapter
HST-1506-I7-8569U	15.6" TFT LCD i7-8569U CPU DDR4 SODIMM x2 4xUSB3.0,2x USB2.0 2x LAN 6 x COM 1xPower Adapter
HST-1506-I5-10210U	15.6" TFT LCD i5-10210U CPU DDR4 SODIMM x2 4xUSB3.0,2x USB2.0 2x LAN 6 x COM 1xPower Adapter
HST-1506-I5-10310U	15.6" TFT LCD i5-10310U CPU DDR4 SODIMM x2 4xUSB3.0,2x USB2.0 2x LAN 6 x COM 1xPower Adapter
HST-1506-I7-10510U	15.6" TFT LCD i7-10510U CPU DDR4 SODIMM x2 4xUSB3.0,2x USB2.0 2x LAN 6 x COM 1xPower Adapter
HST-1506-I7-10610U	15.6" TFT LCD i7-10610U CPU DDR4 SODIMM x2 4xUSB3.0,2x USB2.0 2x LAN 6 x COM 1xPower Adapter

Remark:

(1) Celeron CPU model, I/O: 4*USB2.0, 2*USB3.0; Core CPU model, 4*USB3.0 and 2*USB2.0

(2) Celeron CPU, 1*DDR4 slots; Core CPU, 2*DDR4 slots

Pack list

- HST-1506B
- Power adapter
- Phoenix terminal
- Screws

Options

- Wifi Module
- 3G/4G/5G Module