
PP5089 / 2021 / ISSUE 1

DATASHEET
APOLLO
UNIVERSAL XPERT ADDRESS CARD

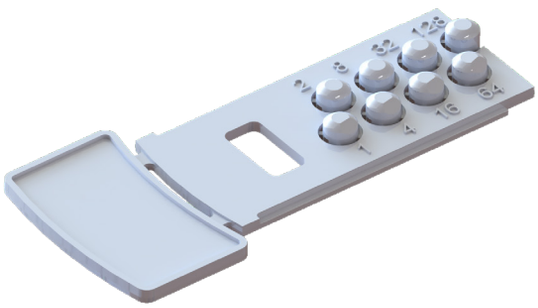

PRODUCT OVERVIEW

Product	XPERT Universal Address Card (Pack of 25)
Part No.	45682-800APO

PRODUCT INFORMATION

The Universal XPERT Address Card has been designed to allow the same card to be used on both, XPERT 7 & XPERT 8 bases.

- Allows installation in all base types
- Includes 128th pip for CoreProtocol systems
- Address pips have additional lead-in for a higher tolerance
- Simplifies and speeds up installation and commissioning
- Address remains the same, no matter how often the detectors are replaced

TECHNICAL DATA

All data is supplied subject to change without notice.


Compatibility	XPERT 7 & XPERT 8 Bases
Number of Pips	8
Pip Height	+0.01 mm
Address Card to Detector Pip Contact Diameter	ø1.7 mm - 2 mm
Break-out Web on Pip (4x per Pip)	0.6 mm
Material	46000-005 (PC) White Colour

ADDRESSING


To set an address using the *XPERT* Universal Address Card you have to remove the pips using a screwdriver. The pips are designated with numbers. Each removed pip is added together to provide the final address.

**note - when using the Universal XPERT Card with XP95 or Discovery devices, the 128 bit pip can be removed or left in-situ.*


ADDRESSING EXAMPLES




1 + 8 = 9




1 + 2 + 8 + 16 = 27




1 + 2 + 32 = 35




4 + 64 = 68




32 + 64 = 96



4 + 16 + 32 + 64 = 116




2 + 4 + 16 + 128 = 150



1 + 2 + 64 + 128 = 195

XPERT 8 BASE WITH XPERT UNIVERSAL ADDRESS CARD SECTIONAL VIEW

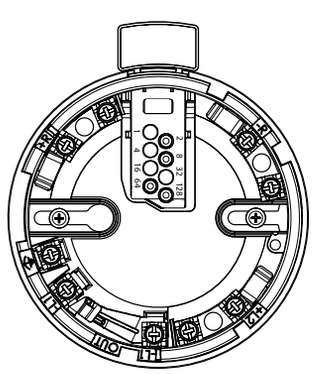

A **Halma** company

© 2021 Apollo Fire Detectors Ltd.