


Pompa a 6 pistoni in ceramica.

Six ceramic piston pump.



Bomba de 6 pistones en cerámica.

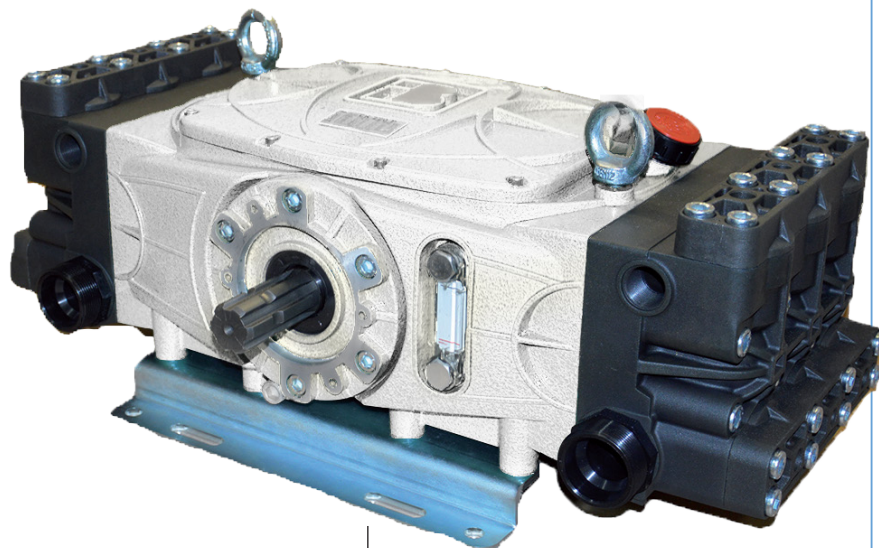


Anteriore - Front - Delantero

Posteriore - Rear - Trasero


P



PP



X

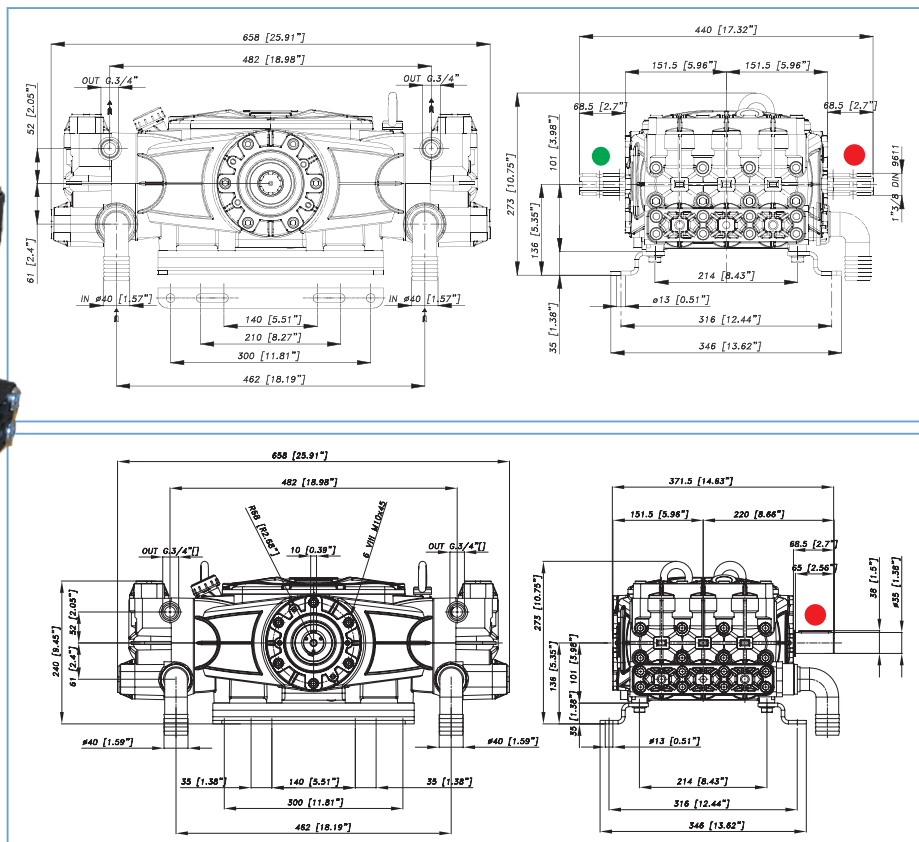


Caratteristiche - Specifications - Características		
Giri al min. - R.P.M.		see tables
Potenza - Power - Potencia		see tables
Peso - Weight - Peso		61 kg (134.5 lb)
Dislivello di aspirazione Negative pressure Desnivel aspiración	MAX	1,5 mt (4.9 ft)
	Servizio discontinuo Discontinuous service Servicio discontinuo	3 mt (9.8 ft)
D. aspirazione - Intake d. - D. Aspiración		2x40 mm (2x 1" 9/16)
D. mandata - High pressure d. - D. envío		G 3/4"
Temperatura - Temperature (MAX)		60°C (140°F)
Tipo olio - Oil type - Tipo de aceite		SAE 30 / W 30
Capacità olio - Oil capacity - Capacidad aceite		2,8 lt (0.74 USG)



Accessori
Accessories
Accesorios




— CKA 170



Rendimenti - Performance - Rendimientos

Giri al min. R.P.M.		400		450		500		550	
bar		l/min	kW	l/min	kW	l/min	kW	l/min	kW
	PSI	US GPM	hp	US GPM	hp	US GPM	hp	US GPM	hp
2		126,5	0,5	142,4	0,6	158,2	0,6	174,0	0,7
	29	33,4	0,7	37,6	0,7	41,8	0,8	46,0	0,9
20		125,8	4,9	141,5	5,6	157,3	6,2	173,0	6,8
	290	33,2	6,6	37,4	7,4	41,6	8,3	45,7	9,1
40		125,1	9,8	140,7	11,1	156,4	12,3	172,0	13,5
	580	33,0	13,1	37,2	14,8	41,3	16,4	45,4	18,0
60		124,4	14,7	139,9	16,5	155,5	18,3	171,0	20,1
	870	32,9	19,6	37,0	22,0	41,1	24,5	45,2	26,9



P

76.7402.97.3 P




X

PP


76.7403.97.3 PP

— CKA 240



Rendimenti - Performance - Rendimientos


Giri al min. R.P.M.		400		450		500		550	
bar		l/min	kW	l/min	kW	l/min	kW	l/min	kW
	PSI	US GPM	hp	US GPM	hp	US GPM	hp	US GPM	hp
2		164,0	0,6	184,5	0,7	205,0	0,8	225,5	0,9
	29	43,3	0,9	48,7	1,0	54,2	1,1	59,6	1,2
20		162,9	6,4	183,3	7,2	203,6	8,0	224,0	8,8
	290	43,0	8,5	48,4	9,6	53,8	10,7	59,2	11,8
40		162,2	12,7	182,5	14,3	202,7	15,9	223,0	17,5
	580	42,8	17,0	48,2	19,1	53,6	21,3	58,9	23,4
60		161,5	19,0	181,6	21,4	201,8	23,8	222,0	26,2
	870	42,7	25,4	48,0	28,6	53,3	31,8	58,7	35,1



P

76.7406.97.3 P

— CKA 220



Rendimenti - Performance - Rendimientos

Giri al min. R.P.M.		400		450		500		550	
bar		l/min	kW	l/min	kW	l/min	kW	l/min	kW
	PSI	US GPM	hp	US GPM	hp	US GPM	hp	US GPM	hp
2		149,5	0,6	168,1	0,7	186,8	0,7	205,5	0,8
	29	39,5	0,8	44,4	0,9	49,4	1,0	54,3	1,1
20		148,4	5,8	166,9	6,6	185,5	7,3	204,0	8,0
	290	39,2	7,8	44,1	8,8	49,0	9,7	53,9	10,7
40		147,6	11,6	166,1	13,0	184,5	14,5	203,0	15,9
	580	39,0	15,5	43,9	17,4	48,8	19,4	53,6	21,3
60		146,2	17,2	164,5	19,4	182,7	21,5	201,0	23,7
	870	38,6	23,0	43,4	25,9	48,3	28,8	53,1	31,6



P

76.7404.97.3 P



X

PP

76.7405.97.3 PP

— CKA 230



Rendimenti - Performance - Rendimientos

Giri al min. R.P.M.		600		700		800		900	
bar		l/min	kW	l/min	kW	l/min	kW	l/min	kW
	PSI	US GPM	hp	US GPM	hp	US GPM	hp	US GPM	hp
2		149,3	0,6	174,2	0,7	199,1	0,8	224,0	0,9
	29	39,5	0,8	46,0	0,9	52,6	1,0	59,2	1,2
20		150,7	11,8	175,8	13,8	200,9	15,8	226,0	17,8
	290	39,8	15,8	46,4	18,4	53,1	21,1	59,7	23,7
40		148,0	14,5	172,7	17,0	197,3	19,4	222,0	21,8
	580	39,1	19,4	45,6	22,6	52,1	25,9	58,7	29,1
60		147,3	17,4	171,9	20,3	196,4	23,1	221,0	26,0
	870	38,9	23,2	45,4	27,1	51,9	30,9	58,4	34,8




X

PP

76.7408.97.3 PP

— CKA 180



Rendimenti - Performance - Rendimientos

Giri al min. R.P.M.		600		700		800		900	
bar		l/min	kW	l/min	kW	l/min	kW	l/min	kW
	PSI	US GPM	hp	US GPM	hp	US GPM	hp	US GPM	hp
2		118,0	0,5	137,7	0,5	157,3	0,6	177,0	0,7
	29	31,2	0,6	36,4	0,7	41,6	0,8	46,8	0,9
50		117,3	11,5	136,9	13,4	156,4	15,4	176,0	17,3
	725	31,0	15,4	36,2	18,0	41,3	20,5	46,5	23,1
60		116,7	13,7	136,1	16,0	155,6	18,3	175,0	20,6
	870	30,8	18,4	36,0	21,4	41,1	24,5	46,2	27,5
70		116,0	15,9	135,3	18,6	154,7	21,3	174,0	23,9
	1015	30,6	21,3	35,8	24,9	40,9	28,4	46,0	32,0




X

PP

76.7407.97.3 PP

— CKA 270



Rendimenti - Performance - Rendimientos

Giri al min. R.P.M.		600		700		800		900	
bar		l/min	kW	l/min	kW	l/min	kW	l/min	kW
	PSI	US GPM	hp	US GPM	hp	US GPM	hp	US GPM	hp
2		181,3	0,7	211,6	0,8	241,8	0,9	272,0	1,1
	29	47,9	1,0	55,9	1,1	63,9	1,3	71,9	1,4
20		180,7	14,2	210,8	16,6	240,9	18,9	271,0	21,3
	290	47,7	19,0	55,7	22,1	63,6	25,3	71,6	28,4
40		180,0	17,7	210,0	20,6	240,0	23,6	270,0	26,5
	580	47,6	23,6	55,5	27,5	63,4	31,5	71,3	35,4
60		179,3	21,1	209,2	24,7	239,1	28,2	269,0	31,7
	870	47,4	28,2	55,3	32,9	63,2	37,6	71,1	42,3



X

PP

76.7409.97.3 PP