


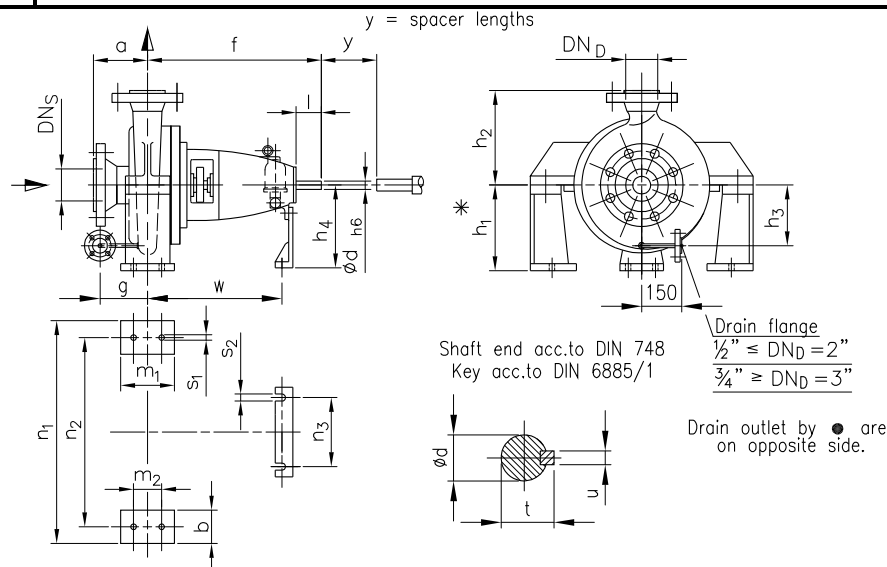

Size	Bearing Bracket	Flanges		Pump dimensions					Socket dimensions											y	Shaft end				Drain flange	
		DN _D	DN _S	a	f	h ₁ *	h ₂	h ₄	b	n ₂	m ₁	m ₂	n ₁	n ₃	Ø s ₁	s ₂	w	Ø d _{h6}	l		t	u	h ₃	g		
32/210	I	1 ½"	2"	80	550	180	180	160	100	310	220	190	410	110	14		389	140	28	80	31	8	119	130		
32/250	II				675		225	180		360	245	215	460				452		42	110	45	12	139	140		
40/210	I		3"	100	550	200	180	160		330	220	190	430							389	28	80	31	8	126	130
40/250	II				675		225	180		360		245	215			460				452	42	110	45	12	143	140
40/320				125		250	250	200		450			550	120		15	442		180							
50/210		I		2"	100	550	200	200		160	350	220	190	450	110	14			389	28	80	31	8	132	130	
50/250	II	125			225	225	180	390				490		14			452		42	110	45	12	152	140		
50/330					250	280	225	460				560	120		15	442	186						165			
65/165●			4"		100	675		200		160	360	245	215	460	110	14	452						142	140		
65/210								225		180													146			
65/250		250		200			460	510		163																
65/320	III	3"		780	250	280	225	130	510	295	245	640	120	24	15	570	48			51,5	14	191	165			
80/165	II		125	675	225	225	180	100	390			490	110	14	14	452	140	110	45	12	150					
80/210						250	180		420	245	215	520									158**					
80/250						250	280		225	440										540	172					
80/320					III		780		280	315	250	130								530	295	245	660	120	24	15
100/210	II	4"	6"		675	225	200	100	440	245	215	540	110	14	14	452	42		45	12	170	140				
100/250	III			140	780	250	280	130	510	295	245	640	120	24	15	570	48	140	51,5	14	185	165				
100/320							315		250	170	630	340									290		800		28	248
100/400							315		280		130	590									295	245	720		24	216
125/250			280			355	250	170	610			780									28	22	580	180	60	140
125/320			315		280					830		256														
125/400			355	400	315		660			860		238														
150/250●			315	375	280					900		256														
150/320		IV	8"	160		355	400	315	170	690	340	290	1000	28									278			
150/400						450	315	730		990							323									
150/500						500	375	830		990							303									
200/250						400	435	355		820							990	295								
200/320	8"		10"	200	355	450	355	790		960	311															
200/400					400	500	355	820		990	321															
200/500					200	560	400																			

* "h₁" up to according motor size only, for bigger motors, "h₁" is identical with axle height of motor!

** 170 if Pump flange ≙ ASME B16.5 Class 300

Issue: 10/20