


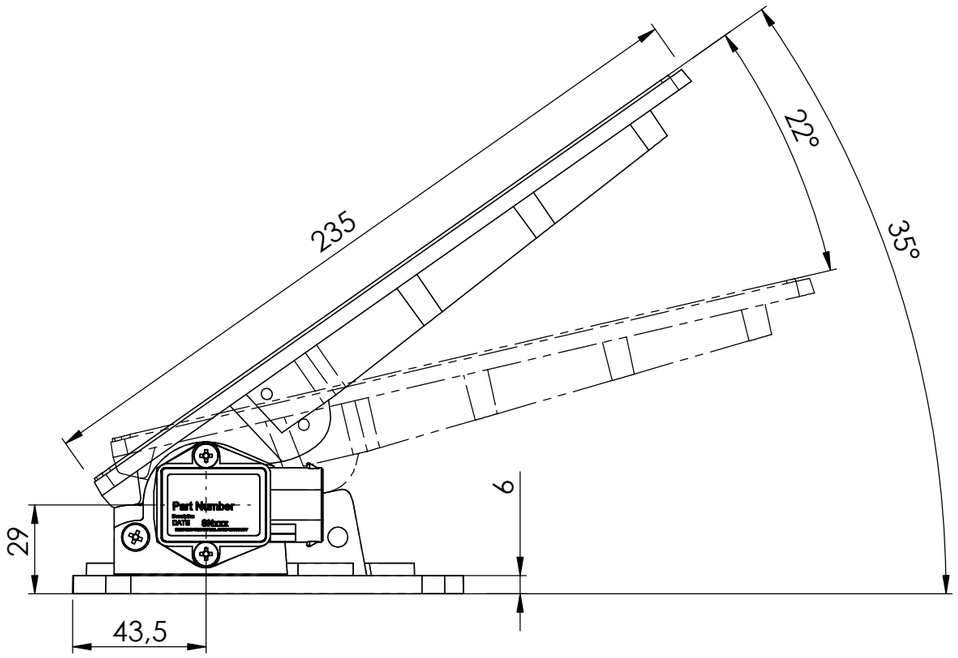


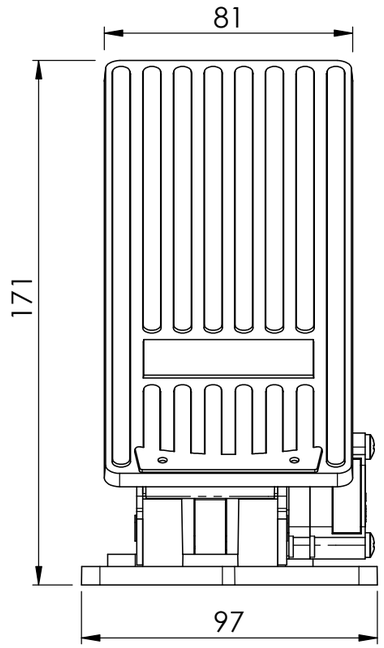


Sensor output signal:

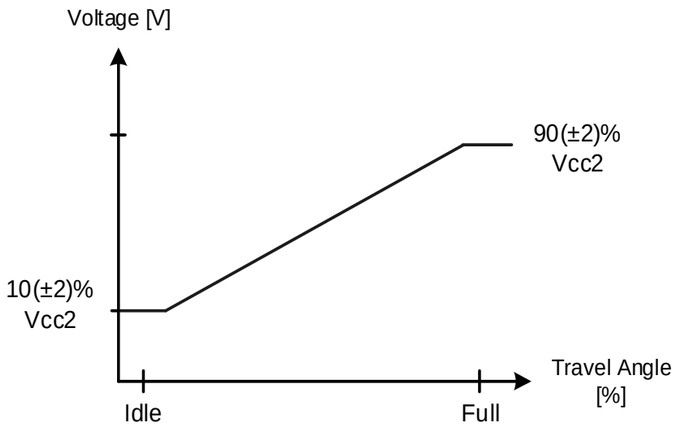



Wire side view


	FUNCTION	PIN N°
SIGNAL 1	-	1
	-	2
	-	4
SIGNAL 2	Ana Vcc2 Supply +5V (+/-0,25V)	6
	Ana Ground 0V	5
	Ana Signal 10 - 90%Vcc2	3

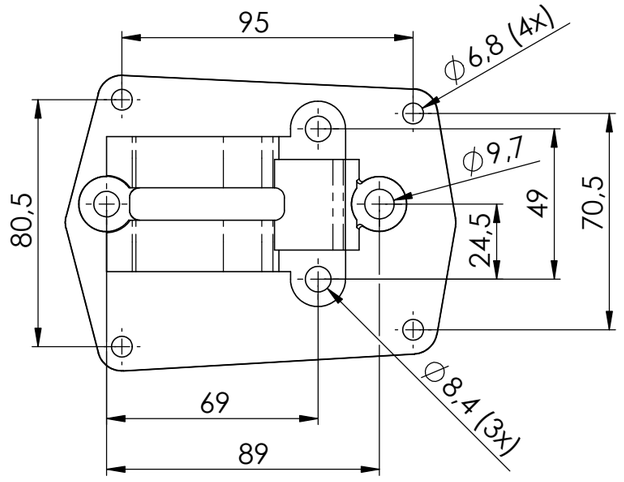


INCLUDED

COUNTER CONNECTOR KIT PN : **KTCN 0962 002**

Connector : AMP Nr. 1-967616-1 (x1)
Terminals : AMP Nr. 0-0962885-5 (x4)
Wire seal : AMP Nr. 0-0967067-1 (x3)
Blind Plug : AMP Nr. 0-0967056-1 (x3)

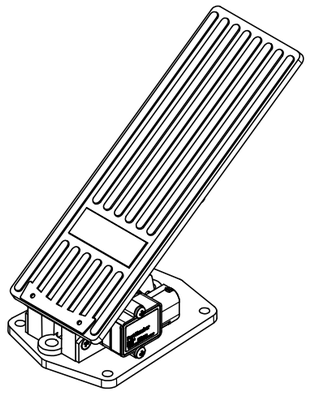

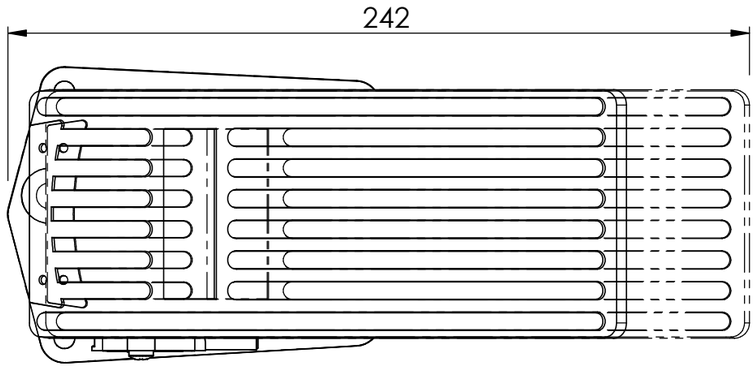

!!! WARNING !!!
Connect throttle sensor ground
to engine ECU ground terminals only.
DO NOT CONNECT TO CHASSIS GROUND

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN mm
TOLERANCES:
ISO 2768 - vL

TITLE:
Throttle Pedal 35°
Ana

	NAME	CREATED DATE
DRAWN	JST	10/02/2022
CHK'D	RD	REV. DATE 10/02/2022

MCS MOBILE CONTROL SYSTEMS SA

This drawing is confidential and remains the sole proprety of Mobile Control Systems S.A. This document is protected in accordance with the prevailling law.

PART NR: **962 135 M101**

REV: **A**

SCALE:1:2

SHEET 1 OF 1

A3