

RENOLD

EINBECK

60-1 RN HV ROLLER CHAIN

60-1 RN HV ROLLENKETTE

Part Number



60HV1

REVISION

A

CLASSIFICATION NO

2-1966.17.000.

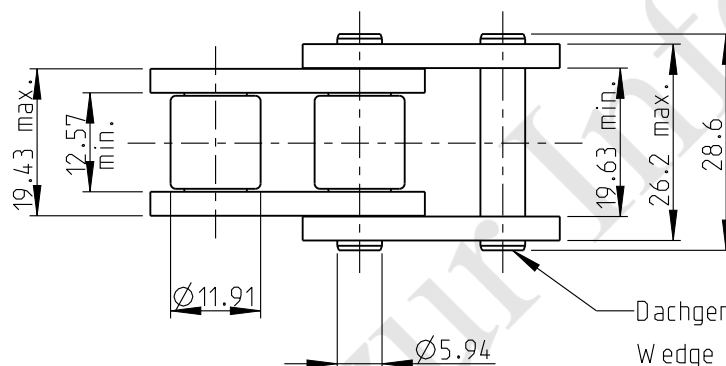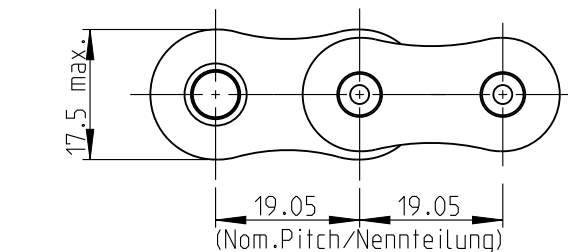

Dachgenietet (Nietkopfdurchmesser $\phi 6.15^{+0.25}$)

Wedge riveted (Diameter of pin after riveting $\phi 6.15^{+0.25}$)

Measuring length: 33 Links	628.65 mm
Measuring length tolerance:	+0.15%
Bearing area:	1.16 cm ²
Lubricant:	No.102
Messlaenge: 33 Glieder	628.65 mm
Zulaessige Laengentoleranz:	+0.15%
Gelenkflaeche:	1.16 cm ²
Schmierung:	Nr.102

1	60HV1	60-1 RN HV ROLLER CHAIN	1
2	1115180	60-1 RN HV PIN LK	1
3	60HV1S6	60-1 RN HV OUTER PLATE	1
4	60HV1S5	60-1 HV RN BEARING PIN	2
5	60HV1S6	60-1 RN HV OUTER PLATE	1
6	60H1S4	60-1 RN H INNER LK CL4	1
7	60H1S3	60-1 RN H INNER PLATE	2
8	60H1S2	60-1 RN H BUSH	2
9	60A1S1	60-1 RN ROLLER	2
ITEM	NUMBER	NAME	QTY

TENSILE STRENGTH	55000 N
PROOF LOAD	18333 N
MEASURE LOAD	550 N
APPROX. WEIGHT (kg/m)	1.855
BASED ON	-
FROM CUSTOMER DRAWING	-
STANDARD	ISO606A

TOLERANCES AS PER NORMAL
RENOLD STANDARDS

ALL DIMENSIONS IN MILLIMETRES

FIRST ANGLE PROJECTION

DRAWN BY	ISSUE DATE
Nico Hausmann	30-Nov-18
LIFE CYCLE	SCALE
Released	1:1
ID NUMBER	SHEET NO
100DDI427	1 of 1