


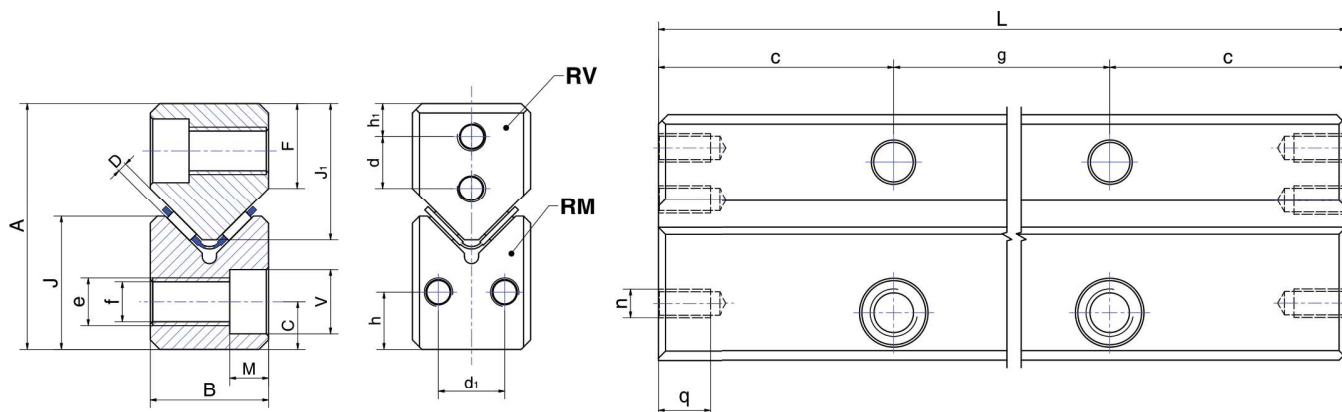

Typ	Grösse	L in mm	Gewicht in g M Schiene	Gewicht in g V Schiene	g	c	D	A 0 −0,3	B	F	J ₁	J	C	e	f	V	M	n	q	h	h ₁	d	d ₁	Optionen	Zubehör
RM RV	2025	200	900	900	100	50	2	52	25	18	29	28	10	M10	8.5	13.5	8.2	M6	11	10	7	11	14	01 02 13 18	Käfig Typ • HW15 AL • HW15 OT Endstücke • GM2025 • GM2025.08 • GV2025 • GV2025.08 • GFM2025 • GFV2025 Schraube • VM8
		300	1365	1350																					
		400	1830	1800																					
		500	2295	2250																					
		600	2760	2700																					
		700	3225	3150																					
		800	3690	3600																					
		900	4155	4050																					
		1000	4620	4500																					
		1100	5085	4950																					
		1200	5550	5400																					
RM RV	2535	300	1905	1965	100	50	2.5	62	30	22	35	34	12	M12	10.5	16.5	10.2	M6	11	15	8	12	18	01 02 13 18	Käfig Typ • HW20 AL • HW20 OT Endstücke • GM2535 • GM2535.08 • GV2535 • GV2535.08 • GFM2535 • GFV2535 Schraube • VM10
		400	2540	2620																					
		500	3175	3275																					
		600	3810	3930																					
		700	4445	4585																					
		800	5080	5240																					
		900	5715	5895																					
		1000	6350	6650																					
		1100	6985	7205																					
		1200	7620	7860																					

Optionsbeschreibung

01 - Einläufe gerundet | 02 - QS | 08 - Abstreifer | 13 - gepaart A = +/- 0.01 mm | 18 - Käfigzwangsteuerung | AL - Aluminium | OT - Messing