



**PRODUCT SPECIFICATION
APPROVAL SHEET**

產品規格承認書

Customer (客戶): _____
Description (規格): AC FAN
Model No (型號): SJ2206HA2 (BAL)
Sample Issue Date(送樣日期): _____
Edition (版本): S4GC—2018A

CONFIRMATION SIGNATURE 客戶承認欄	SAN JU SIGNATURE 三巨確認欄		
Please confirm your acceptance of this approval sheet by return fax. 本承认书内容若贵司确认无误, 请于上方承认栏内签章寄回.	APPD. 核准	EDAM. 審核	DRAW. 制表
	范政煜	项明诚	王军 2021/5/31

台灣三巨國際電機有限公司
Taiwan SanJu International Electric Machinery CO.,LTD

TEL: 0755-28035670/28035671/28035672
FAX: 0755-27993156

**PRODUCT SPECIFICATION
APPROVAL SHEET**

產品規格承認書

一、Sample Specification(樣品規格):

Item(項目)		Specification/Condition(規格/條件)	
01	Part No(型號)	SJ2206HA2	
02	Outline Dimension(外形尺寸)	Φ222mm*60mm	
03	Rated Voltage(額定電壓)	AC 220V~240V	
04	Voltage Range(電壓範圍)	AC 160V~250V	
05	Frequency(頻率)	50/60Hz	
06	Rated Current(額定電流)	0.20A/0.17A±10%	25°C 60~80%RH
07	Power Consumption(消耗功率)	34W/35W±10%	25°C 60~80%RH
08	Speed(轉速)	2650/3150RPM±10%	25°C 60~80%RH
09	Max. Airflow(最大風量)	420/470CFM±10%	25°C 60~80%RH
10	Max. Static Pressure(最大靜壓)	0.68/0.78Inch-H ₂ O	Rated Current(額定電流)
11	Noise Level(噪音)	61/66dB(A)	
12	Ingress Protection of Class(防护等级)	IP44	
13	Weight (重量)	1350g	

二、Electrical Specification(電氣規格):

Item(項目)		Specification/Condition(規格/條件)
01	Dielectric Strength (絕緣耐壓)	AC 1500V 50Hz/1mA/2s
02	Insulation Resistance (絕緣阻抗)	100 Meg Ohm Min. at 500VDC
03	Motor Protection(电机保护类型)	Impedance Protected
04	Temperature Test of Run (運轉溫升)	$\Delta T \leq 70K$ Rated Voltage(額定電壓)
05	Locked Rotor Protection (鎖定檢測)	$\Delta T \leq 130K$ Rated Voltage(額定電壓)
06	Protection (保护功能)	N/A

三、 Safety Approvals(安規情況):

Safety Approvals (安規)	File No (安規編號)	Safety Approvals (安規)	File No (安規編號)
UL	N/A	RoHS-TUV	N/A
CUL	N/A	CCC	N/A
TUV	N/A	CE--LVD	N/A
TUV-EMC	N/A	C-Tick	N/A

TEL: 0755-28035670/28035671/28035672

FAX: 0755-27993156

www.twsanju.com


四、 Environmental Specification(環境條件):

Item(項目)		Specification/Condition(規格/條件)
01	Operating Temp. Range (工作溫/濕度範圍)	Temperature/溫度: -20℃~70℃ Humidity/濕度: 20%~85%RH
02	Storage Temperature (保存溫/濕度範圍)	Temperature/溫度: -30℃~85℃ Humidity/濕度: 20%~85%RH
03	Life (壽命)	40000H (At40℃)

五、 Main Materials/Parts Specification(主要材料/零件規格):


Item(項目)		Specification(規格)
01	Blade(扇葉)	Iron Painted Black
02	Frame(框架)	Aluminum ADC-12,Painted Black
03	Stator& Rotor (定子与转子)	H-23 & H-60
04	Magnet Wires(漆包線)	Copper 2 EIW
05	Bobbin(絕緣套)	PA-66 UL 94 V-0

六、 Label Marking(商標說明):



Ordinal (序號)	Explain (說明)	Content (內容)
1	Bearing(軸承形式)	Ball
2	Model(型號)	SJ2206HA2
3	Specification(規格)	220V-240V~AC 50/60Hz 0.28A
4	Protect(保護形式)	IMPEDANCE PROTECTED
5	Number(編號)	*****
6	Safety Approvals (安規)	N/A

Model Explain(型號說明):

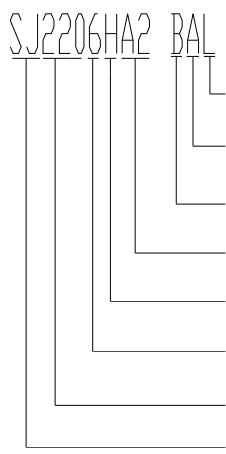

Connector Type(出线方式): L-Lead Wire (引线), T-Two Terminal(端子);

Frame Material(框体材质): A-Aluminum in Black(铝合金), P-Plastic in Black(塑料);

Bearing Type(培林类型): B-Ball Bearing(滾珠轴承), S-Sleeve Bearing(含油轴承);

Rated Voltage(额定电压): A1-120VAC, A2-220VAC, A3-380VAC, A48-48VAC;


Motor Speed(马达转速): H-High Speed(高转), M-Middle Speed(中转), L-Low Speed(低转);

Frame Thickness(框架厚度): 60mm;

Round Frame(圆形框架): Φ220mm;

Company Code(公司代码): SJ-SANJU (三巨)。

七、 Outline Dimension(外觀尺寸圖):

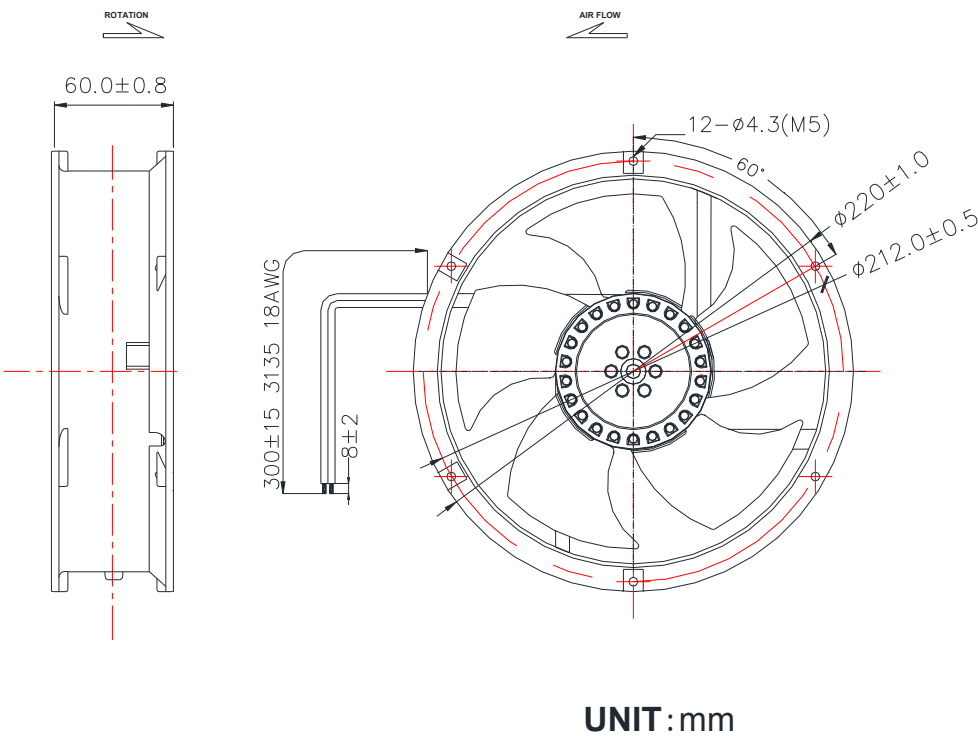

八、 Property(特性圖):

