



Product information

Svänggafflar i stål med topplatta. Svänghuvud med dubbel kulring som är förseglad för att skydda mot damm och smuts. Topplattan med fyra bulthål nitas direkt till gaffeln för att säkerställa jämn rörelse med minimala toleranser i svänghuvudet. L-serien är lämplig för manuellt flyttade laster upp till 400 kg. Hjulen i TE-serien är gjorda av en gjuten hjulmitt av aluminium i ett stycke med ett vulkaniserat polyuretan Wicke-Redthane® 75 Shore A-däck. Redthane®-däcket är fäst vid hjulets mitt med ett speciellt bindemedel. Däcket är nötningsbeständigt med lågt start- och rullmotstånd, med mycket bra dragfunktioner och är extremt tystgående. Däcket är skärsäkert och har bra slithållfasthet. Hjulen är försedda med kullager.

Product number: 165918N

Standard delivery time 1–2 days from dispatch

Catalogue page: 316

Weight: 1,06 kg

DESCRIPTION


DOWNLOADS

CATALOGUE

Product information TE L 02/100/40K-FSTF

Product number: 165918N

Type:	Swivel castor
Tyres:	Redthane® 75 Shore A
Bearing:	Ball bearing
Wheel Diameter:	100 mm
Wheel Width:	40 mm
Front And Back Stop:	Frontstop
Overall Height:	125 mm
Offset:	38 mm
Base Plate Dimension:	105x80 mm
Hole Spacing:	80/76x60 mm
Diameter Mounting Hole:	9 mm
Load Capacity:	200 kg

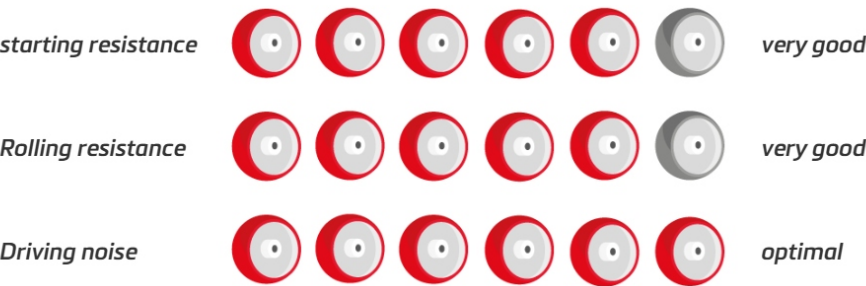

Abrasion



very good