


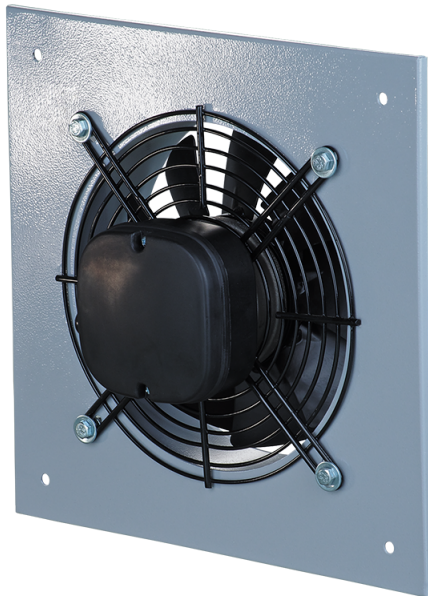



Axis-Q 630 4D

Wall-mounted axial fans

- Sound pressure level LpA at 3 m: 69
- Impeller type: Axial
- Casing material: Coated steel
- Installation in any position



	Unit of measurement	Axis-Q 630 4D
Connected air duct size	mm	630
Phases	-	3
Minimum supply voltage	V	400
Maximum supply voltage	V	400
Power supply frequency	Hz	50
Rated power	W	800
Unit current	A	1.6
Maximum airflow	m³/h	12200
Rotation speed at 50hz	-	1320
Sound pressure level LpA at 3 m	dB(A)	69
Weight	kg	20
Transported air temperature (max)	°C	60
Transported air temperature (min)	°C	-30
Ingress protection rating	-	IP24
Ingress protection rating of the drive	-	IP54
Impeller material	-	Coated steel

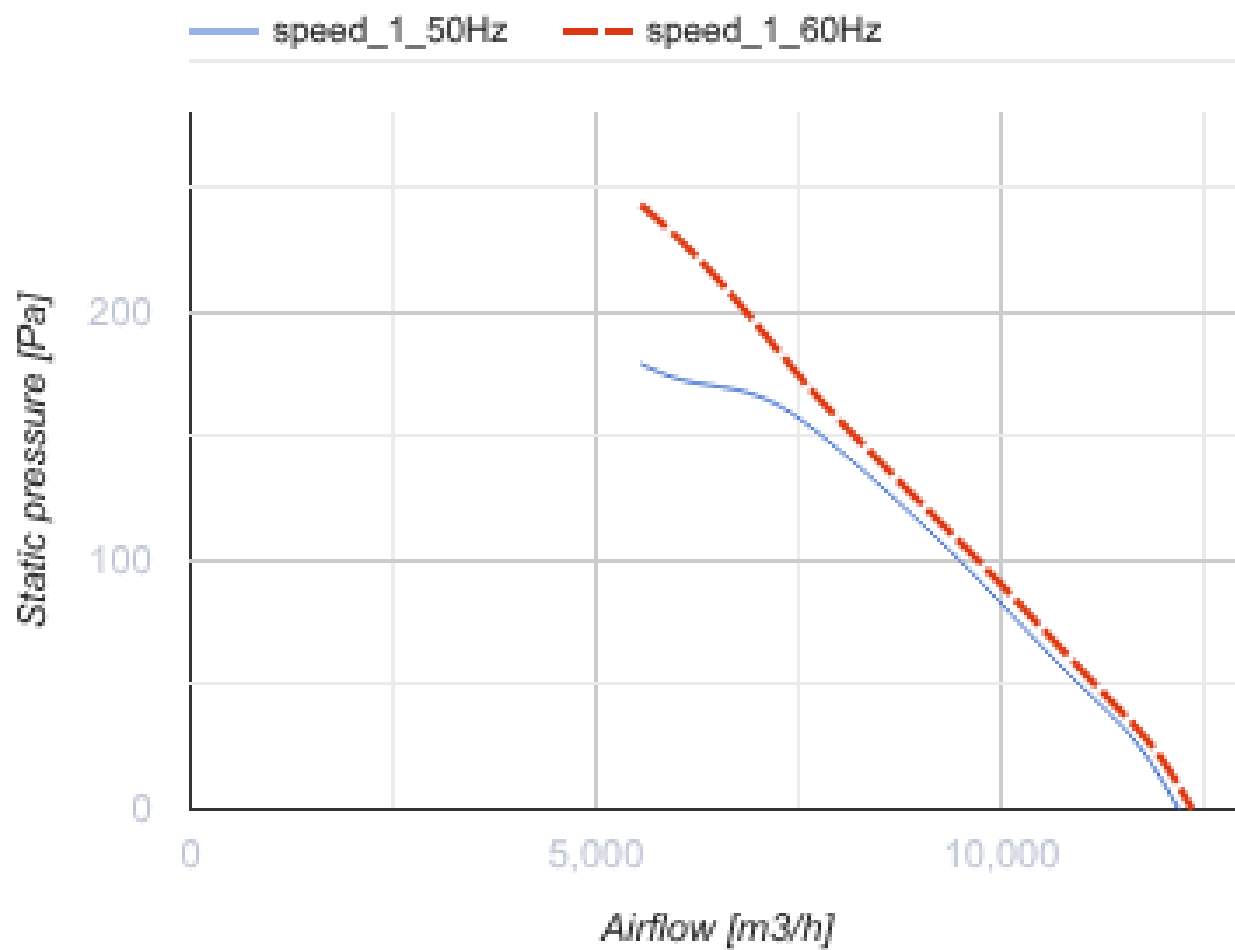

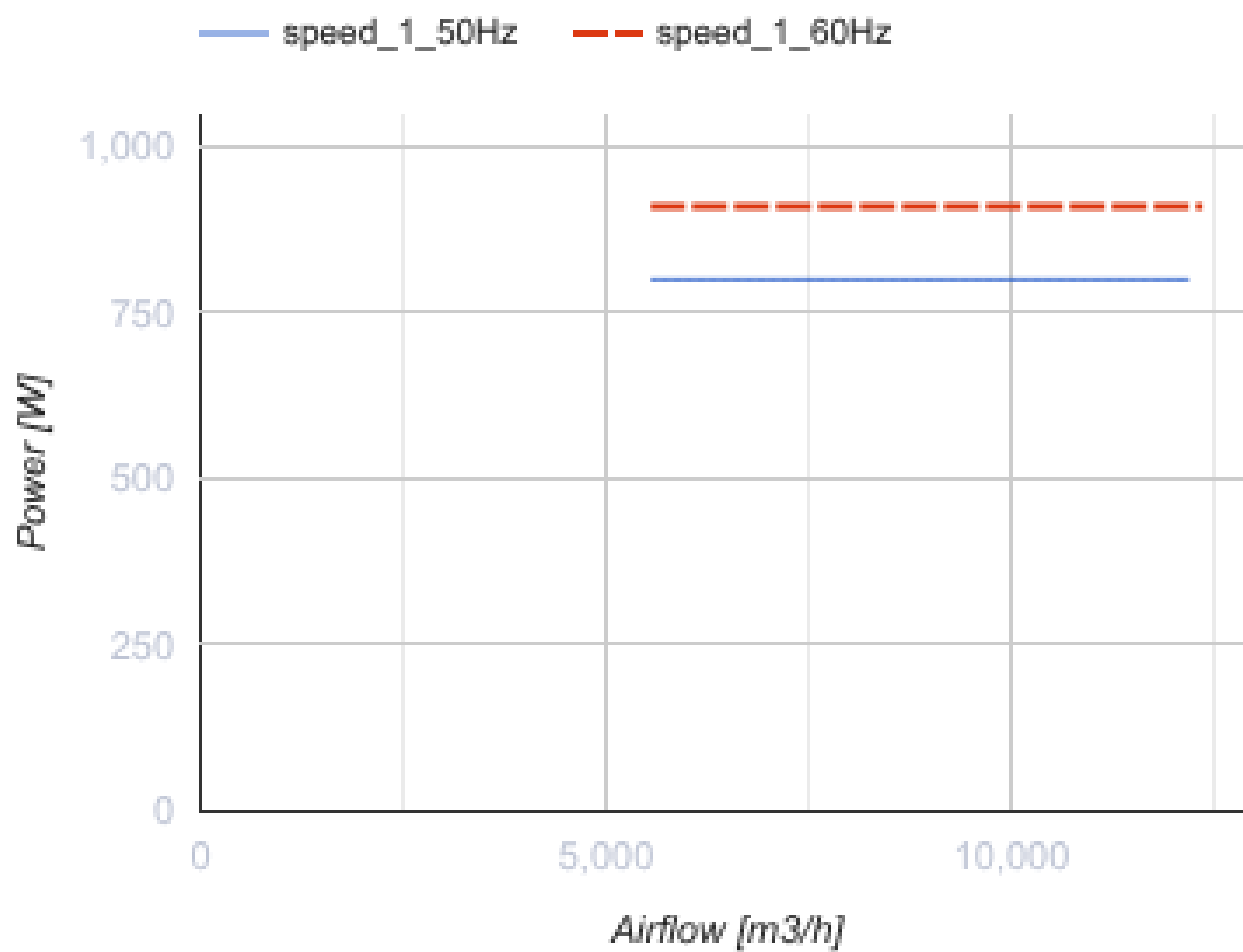

Dimensions

ØD	Ød	B	B1	L
650	11	800	710	275

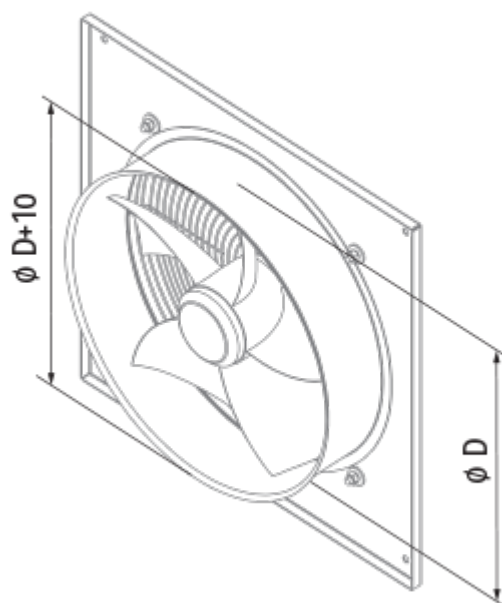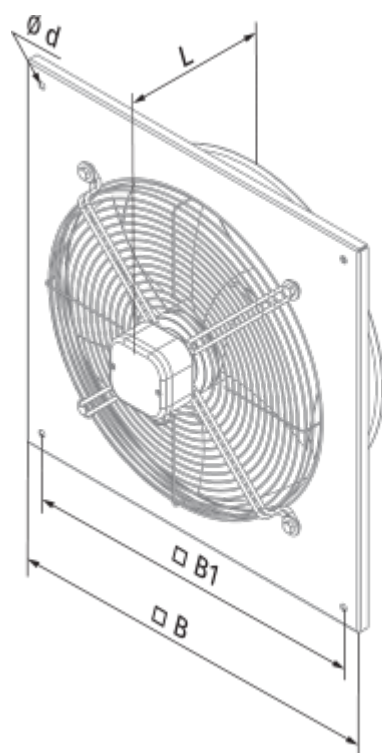

Ecodesign

Trademark	Blauberg
Model	Axis-Q 630 4D
Type of drive installed	External MSD or VSD
Type of heat recovery system	None
Nominal external pressure (Pa)	152
Maximum external leakage rates (%)	2.7
Static efficiency (%)	41.2
Declared typology	NRVU UVU
Sound power level (dB(A))	98
Effective electric power input (kW)	0.81