
M0P009124002V3

DIRECT-ON-LINE-STARTER, 1.4...2.3A (0.55...0.75KW AT 400V), IP65, CONTACTOR COIL VOLTAGE 400VAC 50/60HZ, NON-METALLIC ENCLOSURE, WITH THERMAL OVERLOAD RELAY, WITH START AND STOP/RESET BUTTONS




Product designation			Direct-on-line starter
Product type designation			M0P00912…2V3
Electrical features			
Relay adj range		A	1.4-2.3
IEC technical characteristics (≤440V)			
	Ie	A	2.3
	kW	kW	0.55...0.75
Components			
Starter enclosure standard supplied			M0PA
Contactor standard supplied			BG0910A
Thermal relay standard supplied			RF92V3
UL technical data			
Maximum UL/CSA horsepower ratings single-phase			
	220V-240V	HP	0.5
Maximum UL/CSA horsepower ratings three-phase, 3-pole			
	440V-480V	HP	1
	550V-600V	HP	1
UL degree of protection			Type 1, 12K, 4, 4X
Mechanical features			
Weight		g	760
Ambient conditions			
Operating temperature			
	min	°C	-25
	max	°C	+60
Storage temperature			
	min	°C	-40
	max	°C	+70
Resistance & Protection			
IEC degree of protection			IP65
Dimensions			

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

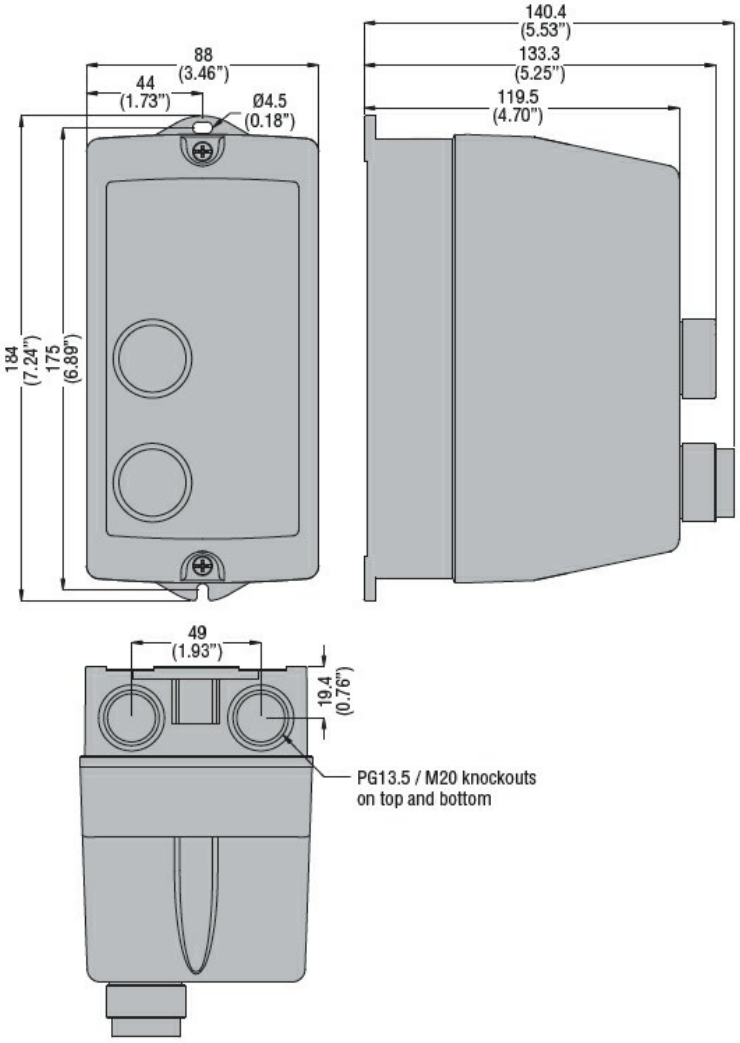

Wiring diagrams

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

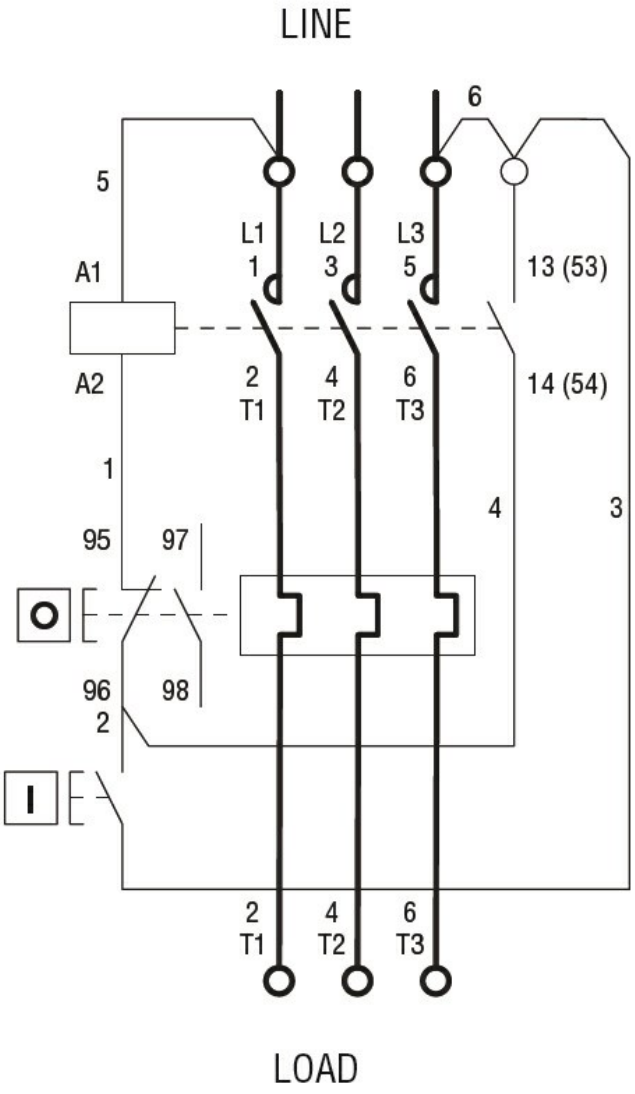

I = Start; O = Stop/Reset

Certifications and compliance

Compliance	
	IEC/EN 60947-1
	IEC/EN 60947-4-1
	UL508 CSA C22.2 n° 14
Certificates	
	CSAus
	cULus
	EAC

ETIM classification

ETIM 8.0	EC001037 - Motor starter/Motor starter combination

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding